


# RDX EXT 89x1000-T4.5 EXTENSION



<b>Load Capacity</b>	N/A*
<b>Overall Length</b>	1000 mm Net: 820 mm
<b>Weight</b>	10 kg (±8%)
<b>Materials</b>	Tube • 89 x 4.5 x 1000 mm • Grade S235
<b>Coupling</b>	2 no. M20x100 Bolts/Nuts
<b>Surface</b>	Hot-dip Galvanised Steel, according to BS EN ISO 1461:2009

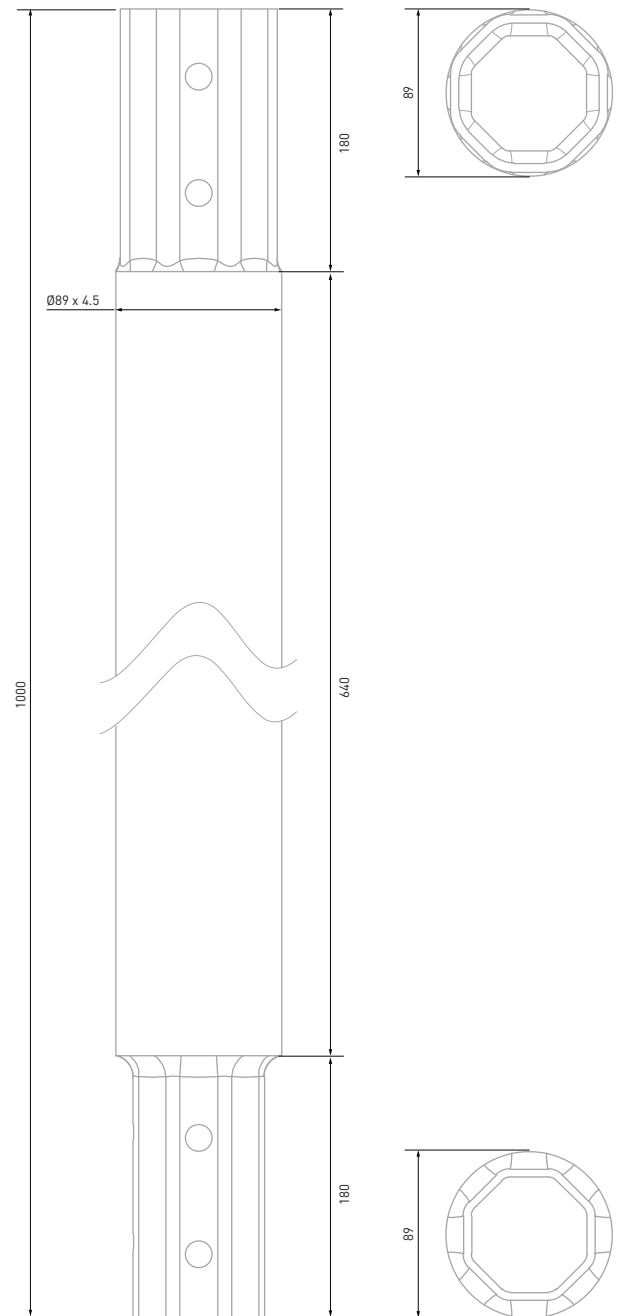


Subject to technical change.

\* RADIX Screw Piles must be selected based on static calculations and results of site-specific ground testing. The manufacturer is not liable for damage caused by insufficient or incorrect selection of screw piles.

# RDX EXT 89x1500-T4.5 EXTENSION



<b>Load Capacity</b>	N/A*
<b>Overall Length</b>	1500 mm Net: 1320 mm
<b>Weight</b>	15 kg (±8%)
<b>Materials</b>	Tube • 89 x 4.5 x 1500 mm • Grade S235
<b>Coupling</b>	2 no. M20x100 Bolts/Nuts
<b>Surface</b>	Hot-dip Galvanised Steel, according to BS EN ISO 1461:2009

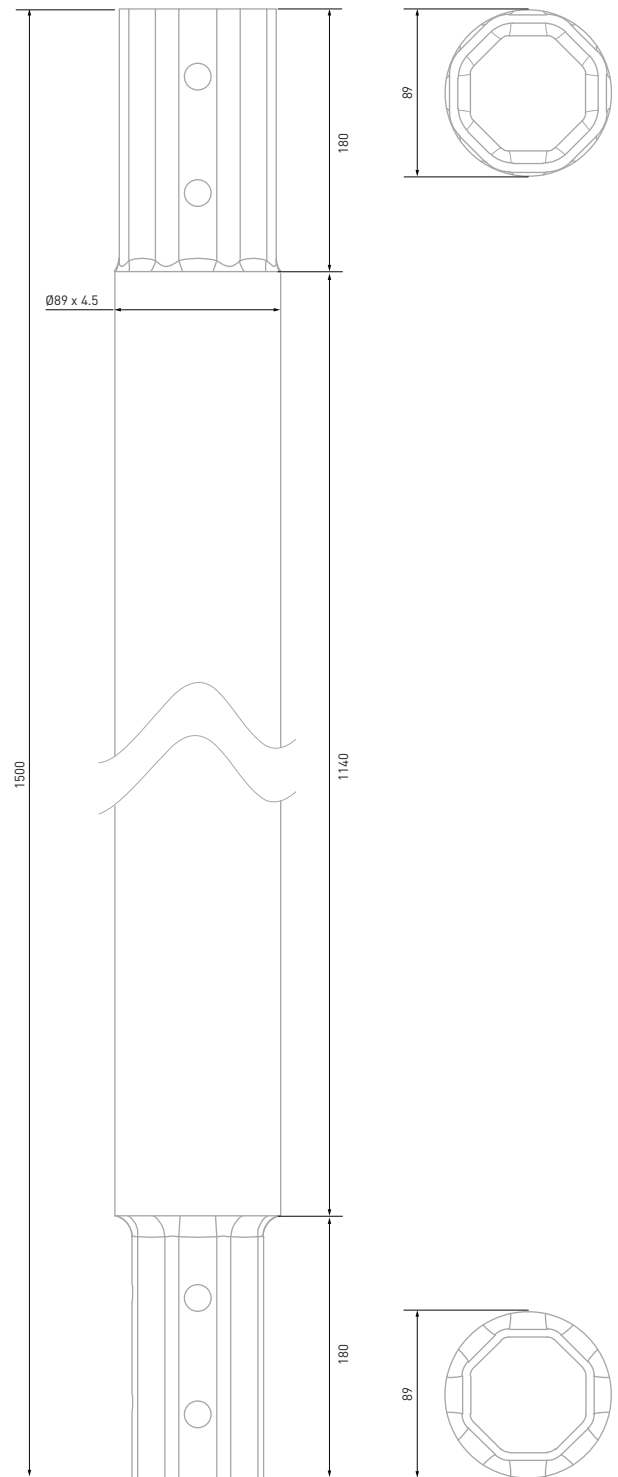


Subject to technical change.

\* RADIX Screw Piles must be selected based on static calculations and results of site-specific ground testing. The manufacturer is not liable for damage caused by insufficient or incorrect selection of screw piles.

# RDX EXT 89x2000-T4.5 EXTENSION



<b>Load Capacity</b>	N/A*
<b>Overall Length</b>	2000 mm Net: 1820 mm
<b>Weight</b>	20 kg (±8%)
<b>Materials</b>	Tube • 89 x 4.5 x 2000 mm • Grade S235
<b>Coupling</b>	2 no. M20x100 Bolts/Nuts
<b>Surface</b>	Hot-dip Galvanised Steel, according to BS EN ISO 1461:2009

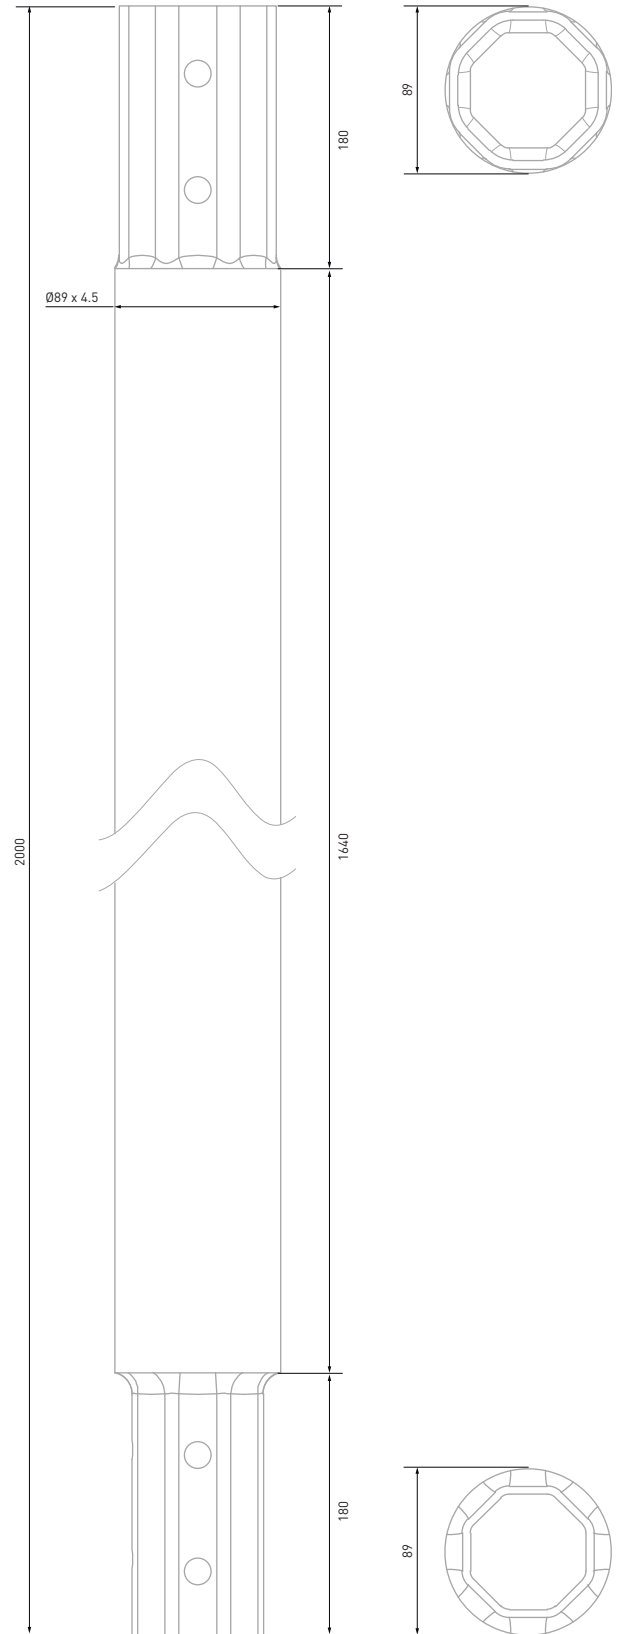

Subject to technical change.

\* RADIX Screw Piles must be selected based on static calculations and results of site-specific ground testing. The manufacturer is not liable for damage caused by insufficient or incorrect selection of screw piles.